

#### **HOME OFFICE**

PO Box 1605 5409 Hamlet Drive Findlay, Ohio 45840-1605 USA inquiries@rowmark.com

### **TECHNICAL SUPPORT**

877.769.6275 /// 419.425.8974 techhelp@rowmark.com

#### **EUROPE OFFICE/WAREHOUSE**

Schaarbeekstraat 44 9120 Beveren-Waas Belgium +32 (0)3 870 41 10 emea@rowmark.com

### **CUSTOM REQUESTS**

800.243.3339 /// 419.425.2407 customerservice@rowmark.com

877.rowmark / rowmark.com




Engage. Interact. Share.










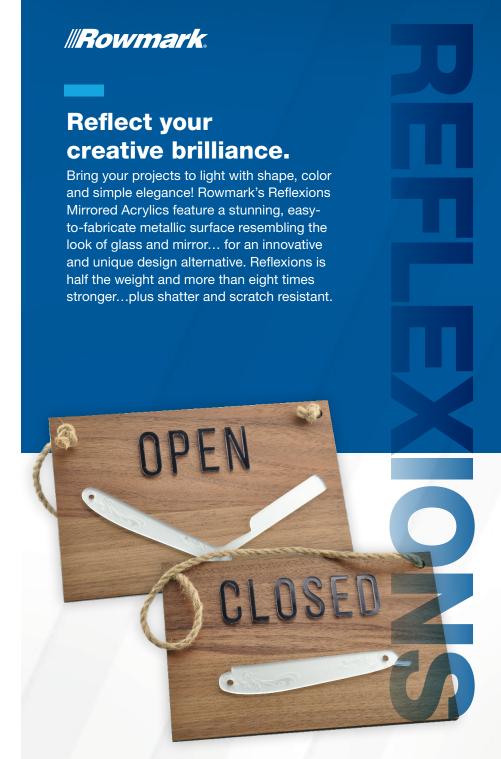

**② ② 9** 

# **REFLEXIONS**







RM942-341 2-ply 1/8"



RM942-351 2-ply 1/8"



RM942-300 2-ply 1/8"





# TECHNICAL SPECIFICATIONS

Cast acrylics have thickness variations that may present difficulties in applications where thickness tolerance is important (i.e. fitting into extrusions, thermoforming applications where walls must maintain uniform thickness and assembly of complex structures). Check gauge when non-contact engraving takes place, and to periodically re-check focal lengths when laser engraving. Multiple passes may be required when lasering certain gauges.

# Material

Cell cast acrylic (PMMA)

#### Finish

Frosted matte non-glare (1 side) Mirrored (1 side)

#### Gloss

## **Sheet Size**

24-1/8" x 48-3/4" // 613mm x 1238mm

# **Engraving Depth**

.003" // 0.08mm

# Usage

Craft & Artistry Projects Exterior Signage Interior Signage Illuminated Wayfinding Ornaments

# Capabilities

Back-lighting Bevels Drills Hot Stamps Screen Prints Shears (works on thicknesses 1/16" & under) Permits Fine Detail Engraving

Bonds Heat Bendable Laser Vector Cuts

