


Rowmark's Safe-T-Mark compares to Norplex, Lamacoid and Melamine in flame tests and electrical conductivity, making it the ideal choice for control panels, industrial, equipment, identification and electrical tags.

Electrically non-conductive, Insulative, Fire retardant, Non-flammable. Meets 10^12 Ohms/square meter or higher in electrical resistivity, UL 94 V0, RoHS compliant (halogen-free), PVC-free, Formaldehyde and Phenol free.



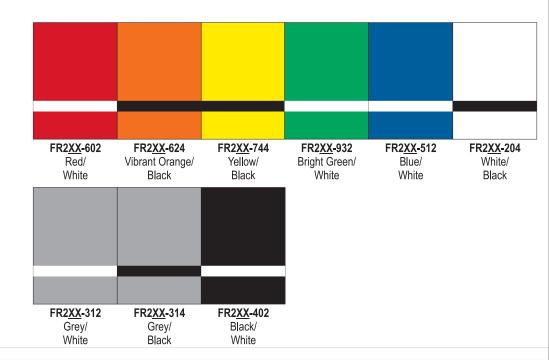

Specifications

Material

» Fire retardant functional polymer

Finish

» Matte non-glare

Sheet Size

» 24-1/8" x 48-3/4" (613 x 1238mm)

Thickness 2-ply

 $^{\rm w}$ 1/16" (1.6mm) Use FR222 as first digits in item code. (Gauges are approximate.)

Thickness 3-ply

 $\,$ $^{\rm w}$ 1/16" (1.6mm) Use FR223 as first digits in item code. (Gauges are approximate.)

Engraving Depth

» .003" (0.8mm)

Usage

- » Interior Signage
- » Control Panels
- » Equipment ID Tags
- » Safety Signage
- » Industrial Signage/Tags
- » Fire Retardant

Engraving Method

» Rotating carbide

Fabrication

- » Saws
- » Saws» Drills
- » Shears
- » Bevels
- » Heat Bendable
- » Screen Prints
- » Hot Stamps
- » Bonds
- » Permits Fine Engraving

Visit www.rowmark.com for Rowmark's complete line of products for rotary engraving, laser engraving and sublimation.

Find answers to all your questions in the Technical Help section. Be sure to check out support tools under the Sales Tools and Downloads sections.

To request a sample or promotional literature, please call 1-877-ROWMARK (419-429-3160) or email samples@rowmark.com. For technical assistance, call 1-877-ROWMARK (419-429-3160), visit www.rowmark.com or email inquiries@rowmark.com.

Can't find exactly what you're looking for? Contact your authorized Rowmark distributor or speak with one of our customer service specialists at 1-800-243-3339 (419-425-2407).





Safe-T-Mark Sign Kit

Fabricate the Safe-T-Mark Sign Kit by downloading the file found under the downloads section of our website at www.rowmark.com.









