## Textures

## **Specifications**

#### Material

» Co-extrued impact acrylic

#### Finish

» Textured

#### **Sheet Size**

» 24 1/8" x 49" (613 x 1245mm)

#### Thickness 2-ply

- » 1/16" (1.6mm)
  Use 822 as first digits in item code.
- » 1/8" (3.2mm)
  Use 842 as first digits in item code.
  (Gauges are approximate.)

#### **Engraving Depth**

- » .007" (.18mm)
- » Acid Yellow, Pimento, Red Clay & Aquamarine: .010" (.25mm)

#### **Engraving Method**

- » Laser
- » Rotating carbide

#### Usage

- » Interior Signage
- » Exterior Signage
- » Personal Identification
- » Equipment ID Tags
- » Safety Signage
- » Recreational Signage
- » Control Panels
- » Industrial Signage/Tags

#### **Fabrication**

» Saws

When sawing Textures, keep finished side down.

- » Drills
- » Shears
- » Laser Vector Cuts
- » Bevels
- » Heat Bendable
- » Screen Prints
- » Hot Stamps
- » Bonds
- » Permits Fine Engraving

Visit www.rowmark.com for Rowmark's complete line of products for rotary engraving, laser engraving and sublimation.

Find answers to all your questions in the Technical Help section. Be sure to check out support tools under the Sales Tools and Downloads sections.

To request a sample or promotional literature, please call 1-877-ROWMARK (419-429-3160) or email samples@rowmark.com. For technical assistance, call 1-877-ROWMARK (419-429-3160), visit www.rowmark.com or email inquiries@rowmark.com.

Can't find exactly what you're looking for? Contact your authorized Rowmark distributor or speak with one of our customer service specialists at 1-800-243-3339 (419-425-2407).





### Textures Sign Kit

Fabricate the Textures Sign Kit by downloading the file found under the downloads section of our website at www.rowmark.com.

# Textures

















rowmark.com / 1.877 ROWMARK / samples@rowmark.com

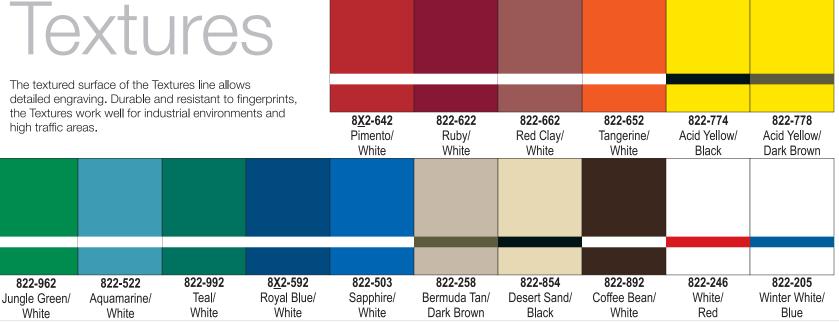

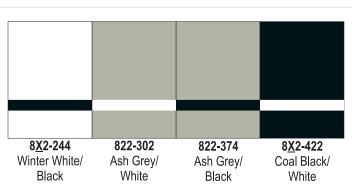

**Textures**